

BREN Inc

Quality Marking Products Since 1972


REPLACING THE CUTTING STRIP ON A BREN CUTTER



To replace the cutting strip on your BREN cutter, first we will need to power the cutter off and remove the old cutting strip. On either the right or left hand side of the cutting strip, use your fingertip or flat object to lift the cutting strip from the base of the machine.

Once a small amount of the cutting strip has been removed you should be able to remove the strip from the base of the cutter. Removing the cutting strip may leave traces of glue on the base of the cutter which you


will need to remove before installing the new cutting strip. It may be necessary to wipe the base of the cutter down to ensure all traces of glue from the previous cutting strip are removed completely.

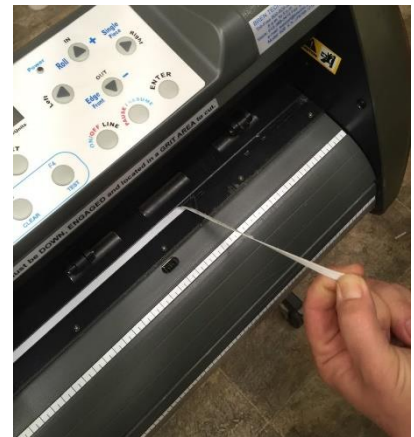

Before installing the new cutting strip remove the backing to expose the adhesive.



Starting from the left side of the cutter, place the new strip in the groove where the previous cutting strip was seated. Press the cutting strip flat in the groove until you reach the opposite side of the machine. There may be a small amount of cutting strip remaining that can be removed with a pair of scissors or a small utility blade.

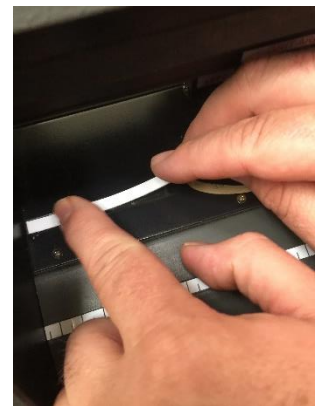

If you are installing a cutting strip on an older model cutter such as a 500-series, it may be necessary to take a flat object and run from one side of the strip to the other to ensure the strip is seated flat in the groove where the cutting strip sits.